




STAINLESS STEEL LIGHT TYPE SCREWED FITTINGS BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD

DIMENSION: LIGHT TYPE
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

UNION ELBOW M.F.

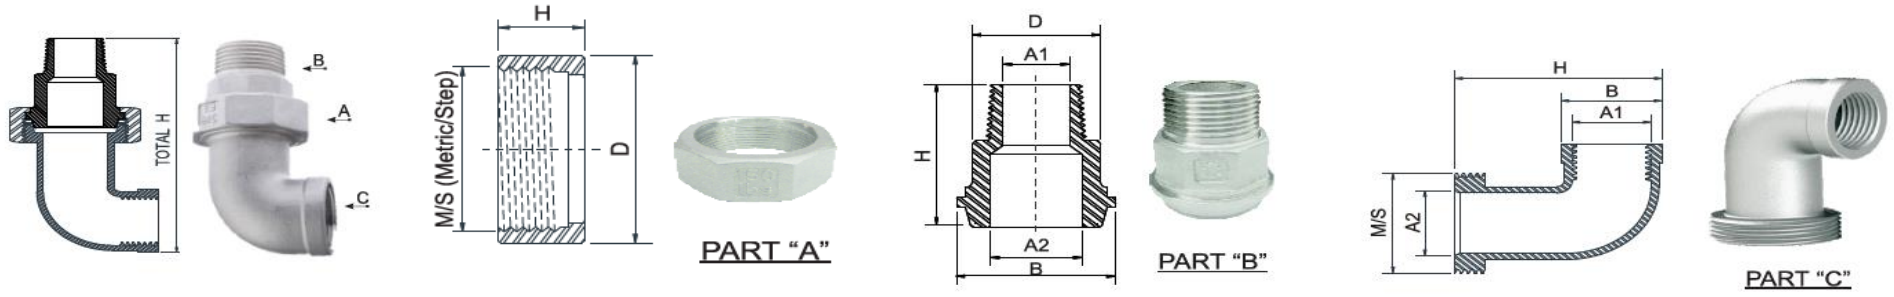

SIZE	Total H (mm)	PART "A"				PART "B"					PART "C"					Weight Kg/Pc	
		D (mm)	H (mm)	M/S (mm)		A1 (mm)	A2 (mm)	B (mm)	D (mm)	H (mm)	A1 (mm)	A2 (mm)	B (mm)	H (mm)	M/S (mm)		
½"	85.0	38.6	13.8	34	2	14.5	21.5	31.1	25.2	36.0	½"	26.2	26.3	51.2	34	2.0	0.20
¾"	93.0	47.0	16.2	42	2	19.8	26.7	39.0	31.6	39.0	¾"	31.9	32.3	55.3	42	2.0	0.32
1"	108.0	55.0	17.5	48	2	24.9	33.0	45.5	38.0	47.0	1"	37.8	40.0	66.5	48	2.0	0.48
1¼"	124.0	66.2	17.7	58	2	32.9	44.0	55.5	47.3	43.0	1¼"	47.5	49.0	78.5	58	2.0	0.64
1½"	131.0	74.5	20.0	67	2	38.7	47.5	64.4	54.0	47.5	1½"	54.2	56.0	84.5	67	2.0	0.90
2"	146.8	81.6	20.0	77	2	51.0	60.5	73.0	64.6	53.2	2"	65.1	68.0	94.5	77	2.0	1.16