




**STAINLESS STEEL
150 LBS SCREWED FITTINGS
BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD**

DIMENSION CONFORM TO DIN 2986
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

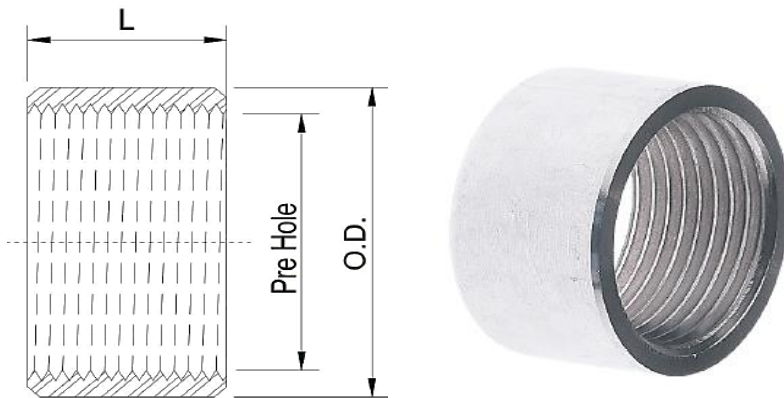

HALF COUPLING DIN 2986

SIZE	O.D.	Pre-Hole	L	Weight
	(mm)	(mm)	(mm)	(Kg/Pc)
1/8"	14.0	8.7	7.0	0.005
1/4"	18.0	11.8	11.0	0.013
3/8"	21.0	15.2	12.0	0.016
1/2"	26.0	19.0	15.0	0.030
3/4"	31.0	24.5	16.0	0.036
1"	39.0	30.7	19.0	0.069
1 1/4"	48.0	39.5	22.0	0.102
1 1/2"	54.0	45.2	22.0	0.120
2"	68.0	57.0	26.0	0.224
2 1/2"	82.0	72.5	30.0	0.276
3"	100.0	85.2	33.0	0.365
4"	122.0	110.5	39.0	0.653