



**STAINLESS STEEL**

**150 LBS SCREWED FITTINGS**


**BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD**

DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018 WHERE APPLICABLE

MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M

PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)

MADE BY LOST WAX INVESTMENT CASTING

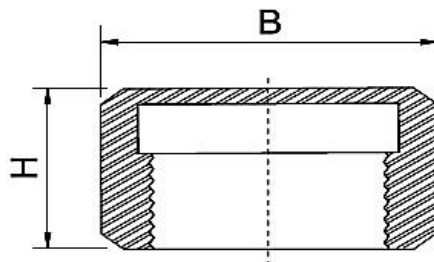

## HEX CAP

SIZE	B	H	Weight
	(mm)	(mm)	(Kg/Pc)
1/8"	14.2	15.4	0.013
1/4"	17.4	17.0	0.020
3/8"	21.2	17.6	0.030
1/2"	25.6	19.5	0.040
3/4"	30.3	20.0	0.050
1"	37.6	27.3	0.100
1 1/4"	47.3	29.4	0.160
1 1/2"	53.6	30.6	0.200
2"	66.5	32.0	0.310
2 1/2"	83.5	35.0	0.610
3"	97.3	37.5	0.900
4"	122.2	40.0	1.330