




STAINLESS STEEL LIGHT TYPE SCREWED FITTINGS BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD

DIMENSION: LIGHT TYPE
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

UNION F.F TEFLON

Economic
Pattern

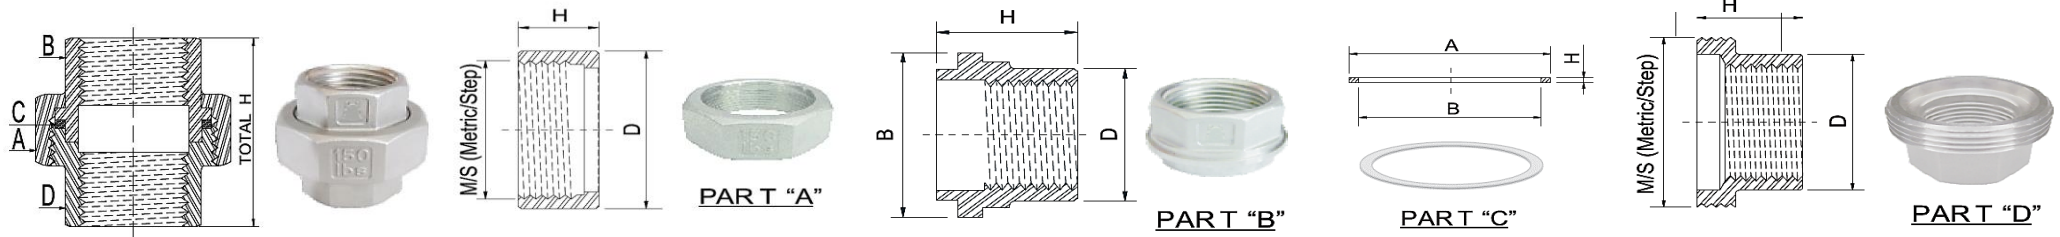

SIZE	Total H (mm)	PART "A"				PART "B"			PART "C"			PART "D"				Weight Kg/Pc
		D (mm)	H (mm)	M/S (mm)		B (mm)	D (mm)	H (mm)	A (mm)	B (mm)	H (mm)	D (mm)	H (mm)	M/S (mm)		
¼"	30.2	30.0	12.9	25	1.0	21.8	18.6	16.2	20.6	15.8	1.8	18.6	15.0	25	1.0	0.06
⅜"	32.0	36.5	13.9	30	1.5	28.0	22.4	16.7	26.8	21.5	1.9	22.4	16.3	30	1.5	0.09
½"	34.0	38.6	13.8	34	1.5	31.4	25.2	18.4	31.1	25.6	2.0	25.2	17.8	34	2.0	0.11
¾"	40.5	47.0	16.2	42	2.0	39.0	31.6	23.5	36.0	30.0	2.0	31.6	20.2	42	2.0	0.20
1"	46.2	55.0	17.5	48	2.0	45.6	38.0	26.1	44.3	36.7	2.0	38.0	23.2	48	2.0	0.26
1¼"	49.5	66.2	17.7	58	2.0	55.5	47.3	27.3	55.0	48.0	2.0	47.3	24.6	58	2.0	0.38
1½"	56.2	74.5	20.0	67	2.0	64.4	54.0	31.7	61.0	53.4	2.0	54.0	28.2	67	2.0	0.56
2"	63.0	81.6	20.0	77	2.0	73.0	64.6	36.0	73.0	65.0	2.3	64.6	30.3	77	2.0	0.58
2½"	67.0	105.0	24.7	96	2.0	92.8	82.0	34.0	82.0	90.0	4.0	82.0	35.0	96	2.0	1.05
3"	83.0	120.0	27.7	111	2.5	107.2	96.0	43.7	103.0	93.0	5.0	96.0	41.0	111	2.5	1.59
4"	95.5	148.5	33.6	138	2.5	137.0	119.0	47.2	130.0	120.0	5.0	118.5	50.0	138	2.5	2.33