




STAINLESS STEEL
150 LBS SCREWED FITTINGS
BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD
 DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018 WHERE APPLICABLE
 MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
 PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
 MADE BY LOST WAX INVESTMENT CASTING

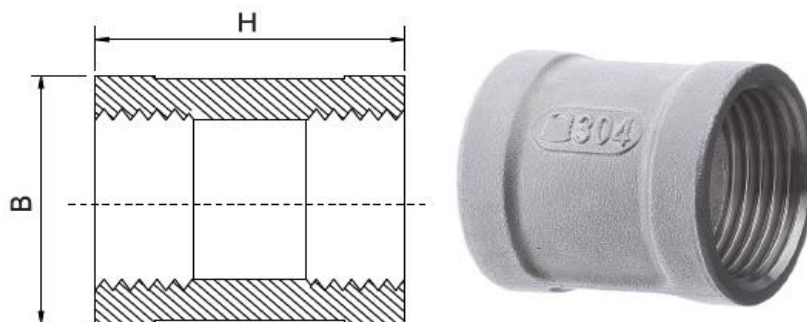

BANDED COUPLING

SIZE	B	H	Weight
	(mm)	(mm)	(Kg/Pc)
1/2"	26.4	34.0	0.050
3/4"	32.3	37.0	0.070
1"	39.8	40.6	0.120
1 1/4"	49.0	49.3	0.170
1 1/2"	55.8	52.4	0.250
2"	68.0	62.7	0.370