






3-PC ISO5211 DIRECT MOUNTING PAD BALL VALVE

FEATURES :

- FULL BORE
- LOCKING-DEVICE
- ANTI BLOW-OUT STEM
- WORKING PRESSURE 1000 WOG / PN63
- LENGTH CONFORM TO DIN 3202/4
- MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
- END CONNECTIONS : FEMALE THREADED ENDS ISO 228/1
SOCKET WELD ENDS (upon request)
BUTT WELD ENDS (upon request)
- ISO 5211 MOUNTING PAD
- MADE BY LOST WAX INVESTMENT CASTING
- STANDARD PRACTICE : MSS-SP-110-1996
- TESTED ACCORDING TO : API 598 & MSS SP-61-2009

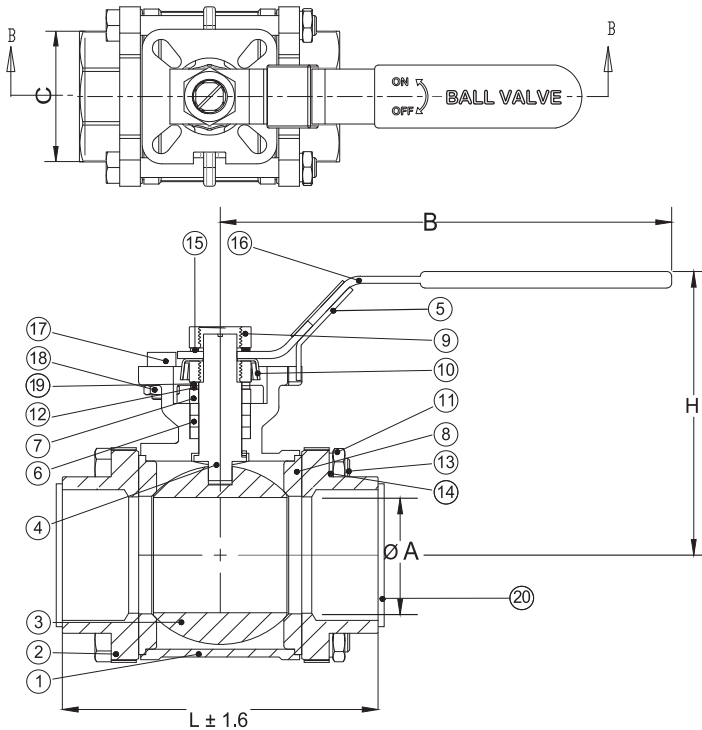

ISO 5211

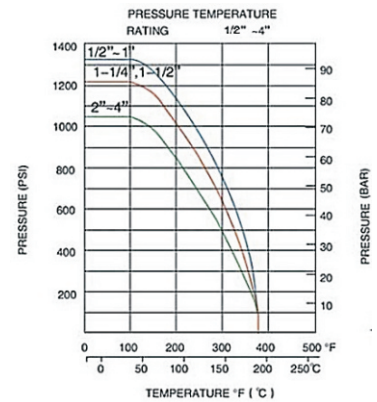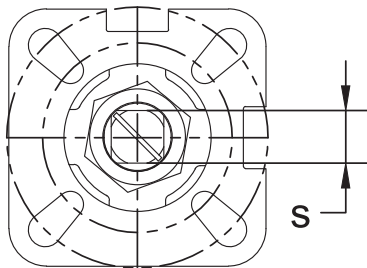

DIMENSIONS

| No. | Size | ØA (mm) | B (mm) | C (mm) | S (mm) | L (mm) | H (mm) | ISO 5211 | | Weight (Kg/Pcs) |
|-----|--------|---------|--------|--------|--------|--------|--------|----------|-----|-----------------|
| | | | | | | | | F04 | F03 | |
| 1. | 1/2" | 15.0 | 125.0 | 26.2 | 9.0 | 59.0 | 65.0 | F04 | F03 | 0.667 |
| 2. | 3/4" | 20.0 | 125.0 | 31.7 | 9.0 | 67.0 | 70.0 | F04 | F03 | 0.808 |
| 3. | 1" | 25.0 | 155.0 | 39.7 | 11.0 | 76.0 | 80.0 | F05 | F04 | 1.209 |
| 4. | 1 1/4" | 32.0 | 155.0 | 48.6 | 11.0 | 85.0 | 90.0 | F05 | F04 | 1.558 |
| 5. | 1 1/2" | 40.0 | 185.0 | 54.5 | 14.0 | 101.0 | 105.0 | F07 | F05 | 2.597 |
| 6. | 2" | 50.0 | 185.0 | 67.5 | 14.0 | 120.0 | 120.0 | F07 | F05 | 3.365 |

| No. | PART NAME | MATERIAL |
|-----|----------------------|----------------|
| 1. | Body | ASTM A351-CF8M |
| 2. | Cap/End-Piece | ASTM A351-CF8M |
| 3. | Ball | ASTM A276-316 |
| 4. | Stem | ASTM A276-316 |
| 5. | Locking Device | AISI 304 |
| 6. | Packing | PTFE |
| 7. | Gland Packing | PTFE |
| 8. | Seat | PTFE |
| 9. | Stem Nut | AISI 304 |
| 10. | Nut Handle Cover | AISI 304 |
| 11. | Nut Body | AISI 304 |
| 12. | Spring Washer | AISI 304 |
| 13. | Bolt Body | AISI 304 |
| 14. | Spring Washer Body | AISI 304 |
| 15. | Spring Washer Handle | AISI 304 |
| 16. | Handle | AISI 304 |
| 17. | Stopper Handle Screw | AISI 304 |
| 18. | Stopper Handle Nut | AISI 304 |
| 19. | Plate Ring | AISI 304 |
| 20. | Plastic Cover | HDPE |