
PERONI KARYA SENTRA EST 1997

STAINLESS STEEL
150 LBS SCREWED FITTINGS
BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD

DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018 WHERE APPLICABLE
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
(PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING



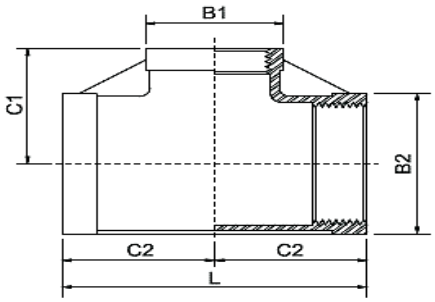

REDUCED TEE

Size	B1	B2	C1	C2	L	Weight
	(mm)	(mm)	(mm)	(mm)	(mm)	(Kg/Pc)
⅜"x¼"	17.4	21.0	21.0	21.5	43.0	0.052
½"x⅛"	13.0	26.4	22.5	26.0	51.5	0.070
½"x¼"	18.0	26.4	22.5	26.0	52.0	0.070
½"x⅜"	21.0	26.4	24.5	26.0	52.0	0.080
¾"x¼"	18.0	32.3	25.0	29.0	58.0	0.110
¾"x⅜"	21.0	32.3	27.0	29.0	58.0	0.120
¾"x½"	26.4	32.3	30.0	29.0	58.0	0.130
1"x⅜"	21.0	39.8	31.0	34.5	69.0	0.190
1"x½"	26.4	39.8	33.5	34.5	69.0	0.200
1"x¾"	32.3	39.8	35.5	34.5	69.0	0.210
1¼"x½"	26.4	49.0	37.5	42.8	85.6	0.290
1¼"x¾"	32.3	49.0	39.5	42.8	85.6	0.310
1¼"x1"	39.8	49.0	42.5	42.8	85.6	0.310
1½"x½"	26.4	56.0	43.6	44.0	88.0	0.410
1½"x¾"	32.3	56.0	43.6	44.0	88.0	0.410
1½"x1"	39.8	56.0	45.5	44.0	88.0	0.430
1½"x1¼"	49.0	56.0	48.5	44.0	88.0	0.430
2"x½"	26.4	68.0	46.5	53.7	107.4	0.580
2"x¾"	32.3	68.0	48.5	53.7	107.4	0.580
2"x1"	39.8	68.0	52.5	53.7	107.4	0.610
2"x1¼"	49.0	68.0	55.0	53.7	107.4	0.640
2"x1½"	56.0	68.0	56.0	53.7	107.4	0.670
2½"x½"	26.4	89.5	63.5	49.5	99.0	0.950
2½"x¾"	32.3	89.5	63.5	49.5	99.0	0.950
2½"x1"	40.0	89.5	62.8	49.5	99.0	1.040
2½"x1¼"	49.0	89.5	66.3	50.5	101.0	1.044
2½"x1½"	56.0	89.5	68.3	52.3	104.5	1.110
2½"x2"	68.0	89.5	69.3	59.5	119.0	1.230
3"x1"	40.0	100.0	68.0	57.5	115.0	1.040
3"x1¼"	49.0	100.0	69.0	57.5	115.0	1.160
3"x1½"	55.5	100.0	71.5	57.5	115.0	1.220
3"x2"	68.0	100.0	74.5	60.5	115.0	1.270
3"x2½"	89.5	100.0	77.5	71.5	143.0	1.650