




STAINLESS STEEL LIGHT TYPE SCREWED FITTINGS BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD

DIMENSION: LIGHT TYPE
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

UNION F.F CONICAL SEAT

Economic
Pattern

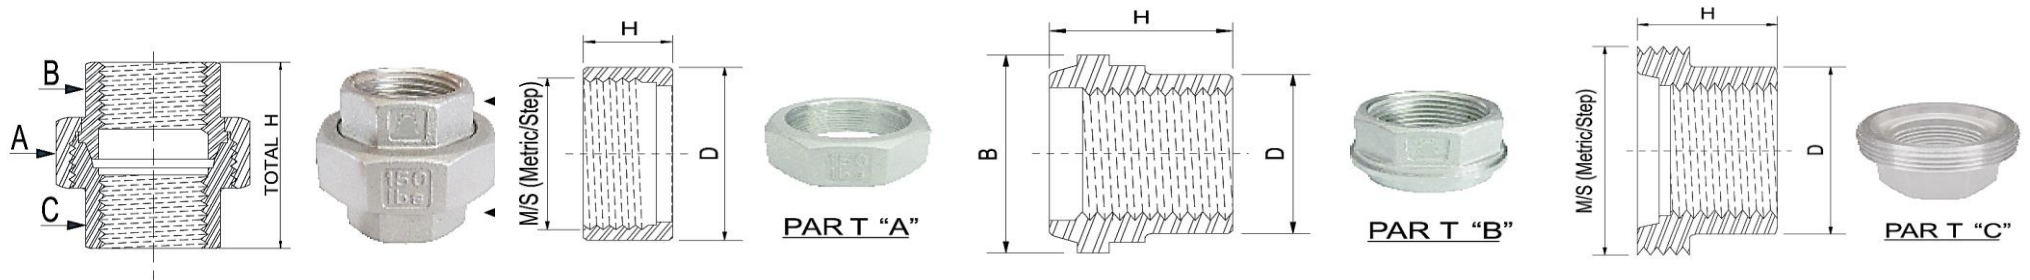

SIZE	Total H (mm)	PART "A"				PART "B"			PART "C"				Weight Kg/Pc
		D (mm)	H (mm)	M/S (mm)		B (mm)	D (mm)	H (mm)	D (mm)	H (mm)	M/S (mm)		
¼"	30.0	28.0	13.0	24	1.5	22.1	17.5	16.2	17.5	15.0	24	1.5	0.06
⅜"	32.0	34.0	14.0	30	1.5	28.7	20.5	16.8	20.9	17.0	30	1.5	0.08
½"	35.2	38.6	13.8	34	2.0	31.1	25.2	20.6	25.2	16.3	34	2.0	0.12
¾"	40.5	47.0	16.2	42	2.0	39.0	31.6	23.5	31.6	18.3	42	2.0	0.19
1"	46.2	55.0	17.5	48	2.0	45.6	38.0	26.1	38.0	21.7	48	2.0	0.27
1¼"	51.0	66.2	17.7	58	2.0	55.5	47.3	28.5	47.3	24.6	58	2.0	0.37
1½"	56.2	74.5	20.0	67	2.0	64.4	54.0	31.7	54.0	27.0	67	2.0	0.56
2"	63.0	81.6	20.0	77	2.0	73.0	64.6	36.0	64.6	29.1	77	2.0	0.57
2½"	69.0	105.0	25.0	96	2.5	93.5	82.0	35.3	82.0	35.7	96	2.5	1.06
3"	85.3	120.0	27.8	111	2.5	107.5	96.0	43.8	96.0	44.5	111	2.5	1.90
4"	97.5	149.0	33.7	138	2.5	137.5	119.0	47.2	119.0	51.6	138	2.5	2.90