




STAINLESS STEEL
150 LBS SCREWED FITTINGS
BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD
 DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018 WHERE APPLICABLE
 MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
 PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
 MADE BY LOST WAX INVESTMENT CASTING

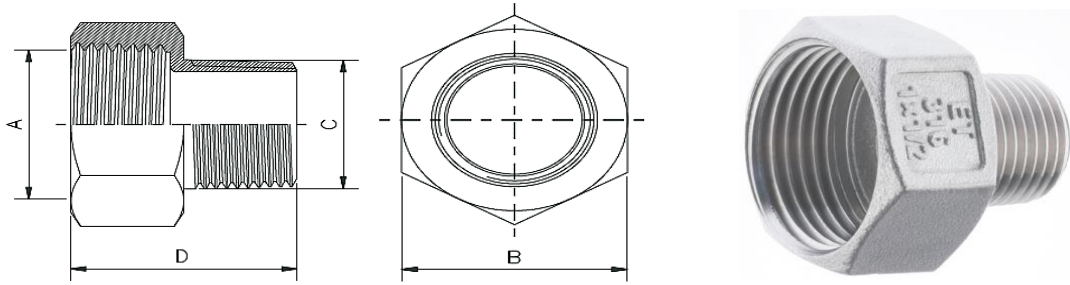

REDUCED SOCKET NIPPLE

Size	A	B	C	D	Weight
	(mm)	(mm)	(mm)	(mm)	(Kg/Pc)
1/4"x1/8"	11.5	15.0	11.0	27.0	0.020
1/4"x1/4"	11.5	15.0	13.5	27.0	0.020
3/8"x1/8"	15.0	22.0	11.0	27.0	0.020
3/8"x1/4"	15.0	22.0	13.5	29.0	0.040
3/8"x3/8"	15.0	22.0	17.0	26.7	0.030
1/2"x1/4"	19.0	24.0	13.5	29.0	0.040
1/2"x3/8"	19.0	24.0	17.0	29.0	0.040
1/2"x1/2"	19.0	24.0	21.0	29.0	0.050
3/4"x1/4"	24.0	30.0	13.5	29.0	0.050
3/4"x3/8"	24.0	30.0	17.0	33.0	0.060
3/4"x1/2"	24.0	30.0	21.0	33.0	0.060
3/4"x3/4"	24.0	30.0	26.5	33.0	0.110
1"x1/4"	30.5	36.0	13.5	33.0	0.070
1"x3/8"	30.5	36.0	17.0	36.0	0.070
1"x1/2"	30.5	36.0	21.0	37.0	0.090
1"x3/4"	30.5	36.0	26.5	37.0	0.090
1"x1"	30.5	36.0	33.3	37.0	0.110
1 1/4"x1"	39.0	46.0	33.3	39.0	0.150
1 1/4"x1 1/4"	39.0	46.0	42.0	44.0	0.160
1 1/2"x3/4"	45.0	55.0	26.5	38.0	0.200
1 1/2"x1"	45.0	55.0	33.3	44.0	0.230
1 1/2"x1 1/4"	45.0	55.0	42.0	44.0	0.240
1 1/2"x1 1/2"	45.0	55.0	48.0	44.5	0.240
2"x1"	57.0	65.0	33.3	48.0	0.327
2"x1 1/4"	57.0	65.0	42.0	48.0	0.333
2"x1 1/2"	57.0	65.0	48.0	49.0	0.320
2"x2"	57.0	65.0	60.0	49.0	0.330