




STAINLESS STEEL LIGHT TYPE SCREWED FITTINGS BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD

DIMENSION: LIGHT TYPE
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

UNION ELBOW F.F.

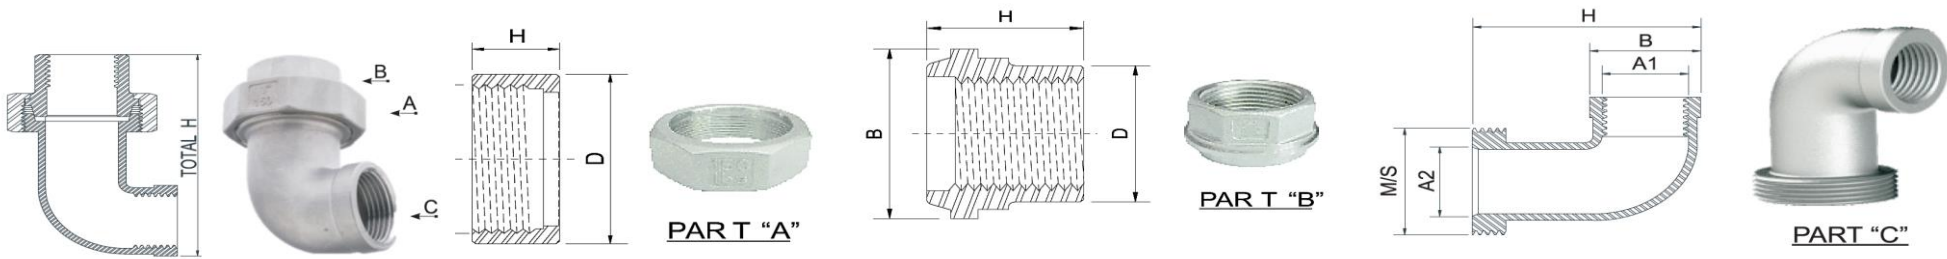

SIZE	Total H (mm)	PART "A"				PART "B"			PART "C"						Weight Kg/Pc
		D (mm)	H (mm)	M/S (mm)		B (mm)	D (mm)	H (mm)	A1 (mm)	A2 (mm)	B (mm)	H (mm)	M/S (mm)		
½"	68.8	38.6	13.8	34	2	31.1	25.2	20.0	½"	26.2	26.3	52.5	34	2.0	0.17
¾"	76.0	47.0	16.2	42	2	39.0	31.6	23.0	¾"	31.9	32.3	56.0	42	2.0	0.28
1"	89.6	55.0	17.5	48	2	45.6	38.0	25.6	1"	37.8	40.0	68.0	48	2.0	0.41
1¼"	104.1	66.2	17.7	58	2	55.5	47.3	28.0	1¼"	47.5	49.0	79.5	58	2.0	0.56
1½"	113.5	74.5	20.0	67	2	64.4	54.0	31.3	1½"	54.2	56.0	86.0	67	2.0	0.80
2"	126.7	81.6	20.0	77	2	73.0	64.6	35.5	2"	65.1	68.0	96.3	77	2.0	0.93