

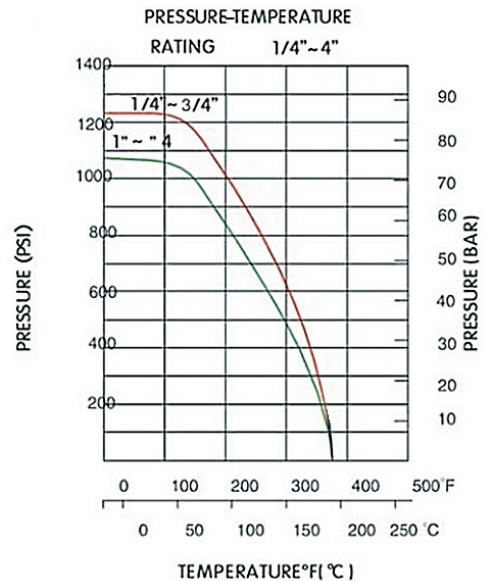


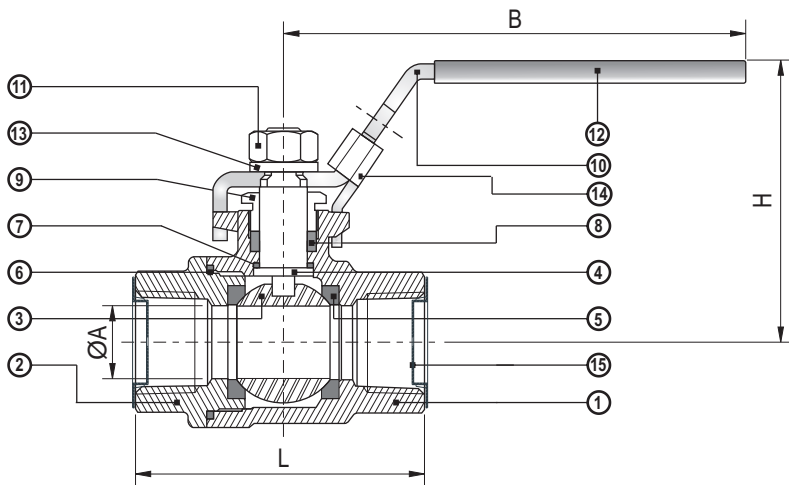

# 2-PC SCREWED END BALL VALVE 1000 WOG

## FEATURES :

- FULL BORE
- LOCKING-DEVICE
- ANTI BLOW-OUT STEM
- WORKING PRESSURE 1000 WOG / PN63
- LENGTH CONFORM TO DIN 3202/4-M5
- MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
- END CONNECTIONS : FEMALE THREADED ENDS ISO 228/1
- MADE BY LOST WAX INVESTMENT CASTING
- STANDARD PRACTICE : MSS-SP-110-1996
- TESTED ACCORDING TO : API 598 & MSS SP-61-2009

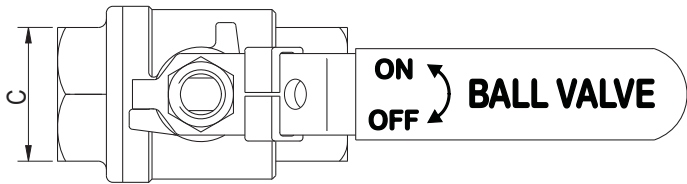

## DIMENSIONS

No.	Size	TYPE	ØA	B	C	L	H	Weight (Kg/Pcs)
			(mm)	(mm)	(mm)	(mm)	(mm)	
1.	1/4"	Standard	12.5	83.8	22.0	51.0	44.7	0.21
2.	3/8"	Standard	12.5	83.8	22.0	51.0	44.7	0.21
3.	1/2"	Standard	15.0	105.0	25.9	60.0	58.3	0.32
		Economic	15.0	105.0	25.0	53.5	58.3	0.25
4.	3/4"	Standard	20.0	105.0	32.0	70.0	62.3	0.48
		Economic	20.0	105.0	29.0	61.5	62.3	0.35
5.	1"	Standard	25.0	125.0	39.5	80.3	71.9	0.78
		Economic	25.0	125.0	37.0	70.0	71.9	0.57
6.	1 1/4"	Standard	32.0	125.0	48.9	93.4	77.6	1.15
		Economic	32.0	125.0	44.0	82.0	77.6	0.83
7.	1 1/2"	Standard	40.0	144.0	53.9	105.0	86.3	1.73
		Economic	40.0	144.0	53.0	94.0	86.3	1.36
8.	2"	Standard	50.0	144.0	67.0	116.0	94.5	2.79
		Economic	50.0	144.0	64.0	106.5	94.5	2.10
9.	2 1/2"	Standard	65.0	243.0	82.0	145.0	130.0	4.84
10.	3"	Standard	80.0	243.0	96.0	168.5	134.5	6.93
11.	4"	Standard	100.0	323.0	125.0	208.0	169.5	13.38

No.	PART NAME	MATERIAL
1.	Body	ASTM A351-CF8M
2.	Cap	ASTM A351-CF8M
3.	Ball	ASTM A276-316
4.	Stem	ASTM A276-316
5.	Seat	PTFE
6.	Seal	PTFE
7.	Thrust Washer	PTFE
8.	Packing	PTFE
9.	Gland Nut	AISI 304
10.	Handle	AISI 304
11.	Stem Nut	AISI 304
12.	Handle Sleeve	PLASTISOL / PVC
13.	Spring Washer	AISI 304
14.	Locking Device	AISI 304
15.	Plastic Cover	HDPE