
PERONI
KARYA SENTRA
EST 1997

STAINLESS STEEL
150 LBS SCREWED FITTINGS

BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD
DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 20 BAR (-20 TO 40°C)
MADE BY LOST WAX INVESTMENT CASTING



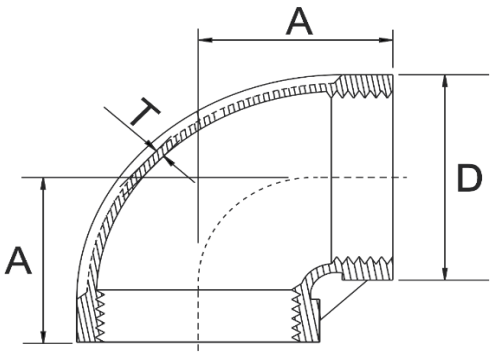

ELBOW 90° F.F.

Dimensions in mm

Size	Min. Outside Diameter	Min. Center-to-End	Min. Wall Thickness	Weight
Inch	D	A	T	Kg
⅛"	14.0	17.0	2.0	0.020
¼"	17.0	19.0	2.0	0.030
⅜"	21.0	21.3	1.7	0.040
½"	26.5	26.8	1.7	0.060
¾"	33.0	31.5	2.4	0.090
1"	40.0	34.8	2.7	0.140
1¼"	50.0	42.0	2.3	0.250
1½"	57.6	46.2	2.3	0.360
2"	69.3	52.4	2.3	0.500
2½"	86.3	68.0	3.6	1.107
3"	100.0	74.0	3.6	1.348
4"	127.0	90.0	4.1	2.134